HSYCO Gateway CM Duo Datasheet

Power supply	⎓dc 24 V nominal (range 9-28 V), max 1.1 A Reverse polarity protection with 1.1 A resettable fuse
Current consumption at VS+ 12 V⎓ including Raspberry Pi CM 3+ Lite, with Ethernet and RS-485 connected, no USB devices	low CPU load: 170 mA 100% CPU load: 410 mA Actual current consumption may vary based on working conditions
Current consumption at VS+ 24 V⎓ including Raspberry Pi CM 3+ Lite, with Ethernet and RS-485 connected, no USB devices	low CPU load: 100 mA 100% CPU load: 220 mA Actual current consumption may vary based on working conditions
Hardware Platform	Strato PI CM Duo v3 Raspberry Pi Compute Module 4S Lite Industrial μSD card 8GB
Serial communication port	RS-485 Half-Duplex with automatic data direction management
Serial port baud rates	1200 to 115200
ESD-Protection voltage on RS-485 A/B	±15 kV human body model ±8 kV contact discharge
Surge protection on RS-485 A/B	Surge protection up to ±500 V / 2 Ohms 1.2/50 µs; 600 W peak pulse power capability at 10/1000 µs waveform
Fail safe feature on RS-485	Yes
Real time clock	Internal RTCC circuit with backup lithium battery. Only use CR1220 or BR1220 batteries. Expected battery life without main power supply: ~2 years
Housing	standard 2M for DIN rail
Electromagnetic immunity compliance	EN 61000-4-2 (ESD) EN 61000-4-3 (Radiated RF Field) EN 61000-4-4 (Burst/fast transient) EN 61000-4-5 (Surge) EN 61000-4-6 (Conducted) EN 61000-4-8 (Power frequency magnetic field)
Operating temperature	-20…+60 °C
Storage temperature	-30…+80 °C

HSYCO Pi CM Duo Datasheet (cont)

Altitude	Up to 2000 m
Humidity	5% to 95% RH noncondensing
Protection degree	IP20
Weight	160 g (including Raspberry Pi Compute Module)

Dimensions

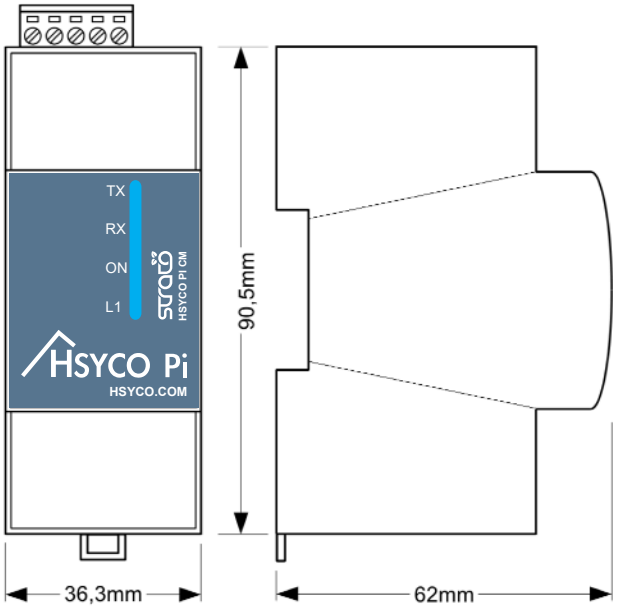

DIMENSIONS (mm)

Disposal

Waste Electrical & Electronic Equipment

(Applicable in the European Union and other European countries with separate collection systems). This marking on the product, accessories or literature indicates that the product should not be disposed of with other household waste at the end of their working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, separate these items from other types of waste and recycle them responsibly to promote the sustainable reuse of material resources. Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take these items for environmentally safe recycling. This product and its electronic accessories should not be mixed with other commercial wastes for disposal.

Strato Pi CM Duo contains a small non rechargeable manganese dioxide lithium coin battery.

In the Strato Pi CM Duo, the battery is not accessible from the outside. You should first remove the case body to gain access to the Strato Pi CM Duo circuit board. Always remove the battery before disposing of this product.

Installation and use restrictions

Standards and regulations

The design and the setting up of electrical systems must be performed according to the relevant standards, guidelines, specifications and regulations of the relevant country. The installation, configuration and programming of the devices must be carried out by trained personnel.

The installation and wiring of connected devices must be performed according to the recommendations of the manufacturers (reported on the specific data sheet of the product) and according to the applicable standards.

All the relevant safety regulations, e.g. accident prevention regulations, law on technical work equipment, must also be observed.

Safety instructions

Carefully read the safety information section at the beginning of this document.

Set-up

For the first installation of the device proceed according to the following procedure:

- ✓ make sure all power supplies are disconnected
- ✓ install and wire the device according to the schematic diagrams on the specific product user guide

✓ after completing the previous steps, switch on the power supply and other related circuits.

Conformity Information

EU

This device complies with the following applicable European Community harmonised standards:

✓ 2014/30/EU - Electromagnetic Compatibility Directive (EMC)

✓ 2011/65/EU and 2015/863/EU - Restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS)

The following harmonised standards have been used to demonstrate conformity to these directives:

✓ EN61000-6-2:2019 - EMC Immunity standard for industrial environments

✓ EN 61000-6-3:2007/A1:2011/AC:2012 - EMC Emission standard for residential, commercial and light-industrial environments

The declaration of conformity is available on the internet at the following address:

https://www.sferalabs.cc

USA

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help.

Shielded cables must be used with this equipment to maintain compliance with FCC regulations.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CANADA

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

RCM AUSTRALIA / NEW ZEALAND

This product meets the requirements of the standard EN 61000-6-3:2007/A1:2011/ AC:2012 - Emission for residential, commercial and light-industrial environments.